



## FEATURES

- Reduces costs in carpentry
- Max Temperature 100°C





## APPLICATIONS

- Foam suppression
- Air treatment

# CLWG Series

*Tangential-flow hollow cone nozzles*

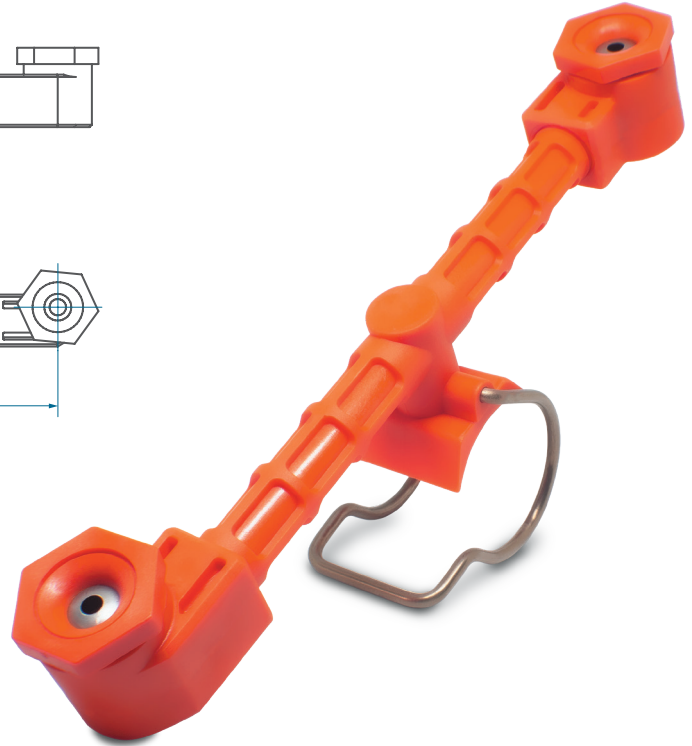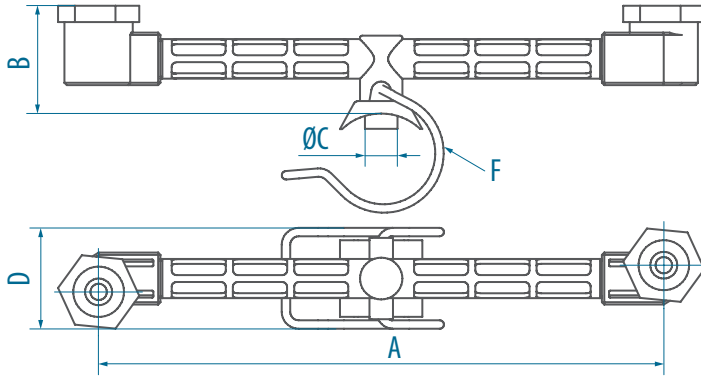

Dim.	CLWG200		CLWG240	
	W07	W08	W07	W08
NPS	1 1/4"	1 1/2"	1 1/4"	1 1/2"
A	200	200	240	240
B	50	50	50	50
C	13,8	13,8	13,8	13,8
D	45	50	45	50

## OPERATIVE DATA

ANGLE	Mat.	Clamp		FLOW CODE	Operating curve									
	33	W07	W08		Flow-rate discharged [l/min] at pressure [bar(g)]									
	PP/GF	NPS 1 1/4"	NPS 1 1/2"		0,5	0,7	1	1,5	2	2,5	3	4	5	
90°	x	x	x	424	4,50	5,32	6,36	7,79	9,00	10,1	11,0	12,7	14,2	
	x	x	x	437	5,90	6,98	8,34	10,2	11,8	13,2	14,5	16,7	18,7	
	x	x	x	440	6,25	7,40	8,84	10,8	12,5	14,0	15,3	17,7	19,8	
	x	x	x	453	8,00	9,47	11,3	13,9	16,0	17,9	19,6	22,6	25,3	
	x	x	x	469	11,0	13,0	15,6	19,1	22,0	24,6	26,9	31,1	34,8	